


Model : PML FEATURES

- Non-slip operation lever
- Nickie plating, longer service life
- Laborsaving rotation shaft for convenient operation.
- Strong permanent magnetism to guarantee concentrated and steady magnetic power
- Wide ranges of use in metal production, mining, transportation, port and pier.

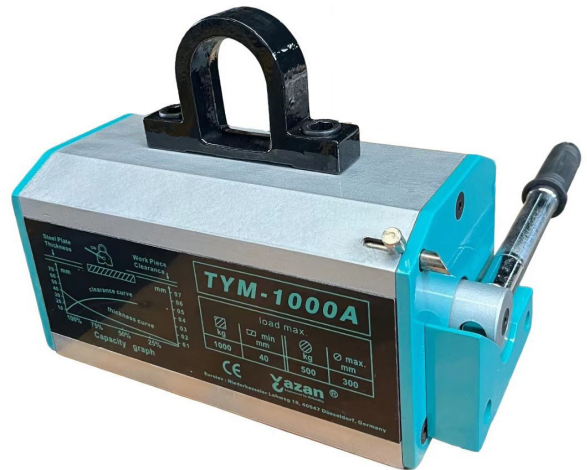


WORKING PERFORMANCE

Stable and lasting working performance magnet lifter



SAFETY FACTOR

High safety factor, strong pull - off - strength and strong permanent magne! circuit.

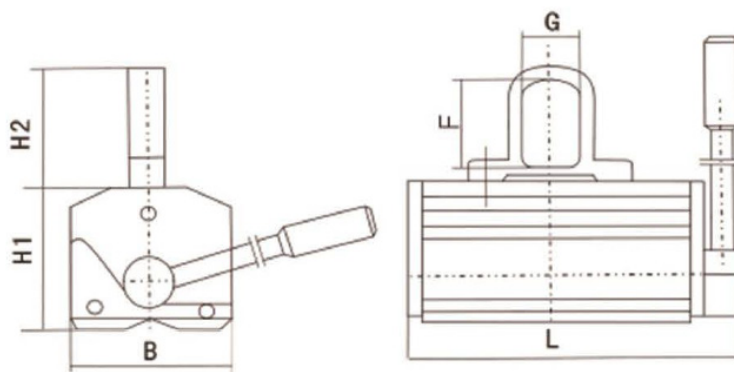

Model		PML-0.1	PML-0.3	PML-0.6	PML-1	PML-1.5	PML-2
Rated Load(kg)		100	300	600	1000	1500	2000
pull-off Load(kg)		350	1050	2100	3500	5250	7000
Dimensions (mm)	L(mm)	137	199	263	303	348	394
	B(mm)	62	90	115	150	166	175
	H1(mm)	66	95	107	140	156	170
	H2(mm)	45	68	78	88	102	102
	R(mm)	120	175	225	266	366	343
	F(mm)	32	50	58	64	76	76
	G(mm)	21	38	42	50	56	56
Weight (kg)		4	11	22	42	64	80