



HORIZONTAL LIFTING CLAMP

Model : L FEATURES

- Suitable for lifting and transport of steel plates, construction and profiled bar in horizontal position.
- Manufactured from high quality carbon steel.
- Avoid snatch or shock loading.
- The working load limit is the maximum load that the clamp is authorized to support when used in pairs with a lift angle of 60°. In lifting operations the clamps can be used in pairs or multiples.
- The main body and parts are made from die-forged special alloy steels, which are optimally tempered for maximum strength and durability.

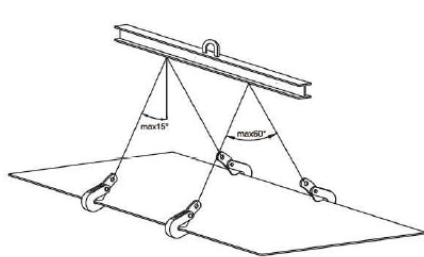

TECHNICAL PARAMETERS

Model	WLL(tons)	Jaw Opening(mm)	Weight(kg)
L0.8	0.8	0-15	1.6
L1	1	0-20	4.3
L1.6	1.6	0-25	6.4
L2	2	0-30	7.8
L2.5	2.5	0-40	11
L2.5(B)	2.5	25-50	12.5
L3.2	3.2	0-40	12.5
L3.2(B)	3.2	30-60	11.6
L5	5	0-50/10-60	18.7
L5(B)	5	50-80	21