


Model : SJ FEATURES

- Mechanical Transmission Principle: Made of high-quality steel, safe and durable.
- Controllable Lifting & Lowering: Avoids the risk of hydraulic jacks losing contrai when oil leakage occurs.
- Compact Design: Collapsible lever for easy operation and maintenance.
- Wide Application: Two applicable support stands, much higher lifting range.
- Safety Guaranteed: Ali jacks tested with 25% overload.

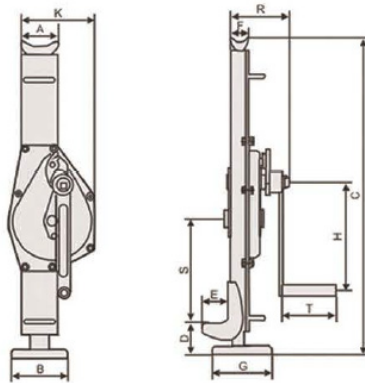

TECHNICAL PARAMETERS

Model		SJ-1.5	SJ-3	SJ-5	SJ-10	SJ-16	SJ-20	SJ-25
Capacity(t)		1.5	3	5	10	16	20	25
Test Load (kN)		18.4	36.8	61.3	122.5	196	245	306
Hand Force to Lift Full Load (N)		140	196	235	431	580	650	750
Dimensions (mm)	A	77	83	105	120	153	153	153
	B	100	130	140	140	150	150	198
	C	605-905	720-1075	735-1065	795-1155	790-1105	88-1155	950-1360
	D	55-355	55-410	60-390	90-430	90-405	90-405	110-520
	E	55	60	70	80	85	85	85
	F	40	45	68	73	90	90	90
	G	110	138	175	175	182	182	230
	H	225	285	285	330	360	360	360
	K	121	200	190	252	275	275	388
	R	119	140	155	185	210	224	200
	S	185	230	220	220	202	202	205
	T	126	126	126	250	250	250	250
Net Weight (kg)		10.7	21.3	27	47	64.5	72	93